




QUAD CONFIGURATION FOR WELL WATER, OR IRRIGATION PARALLEL SYSTEMS IN SERIES RATED TO 22-30GPM: Two Views

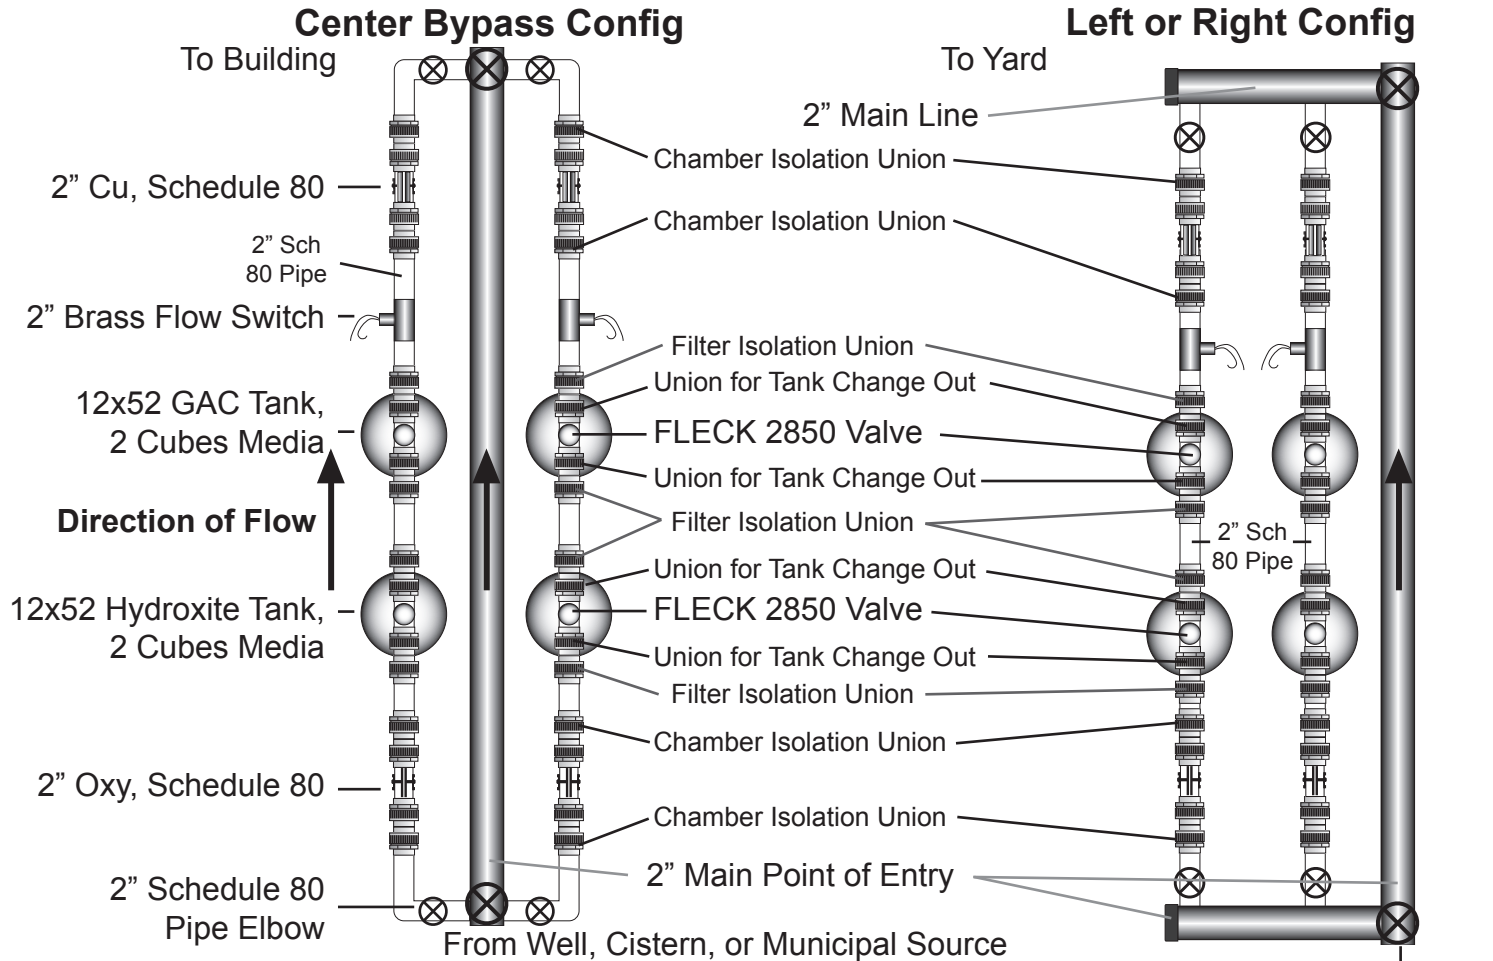

2" INLET, BYPASS IS STRAIGHT THROUGH
 Two 2" LINES IN PARALLEL
 Two 12x52 GAC AND HYDROXITE TANKS, 1 SET IN EACH SERIES
 Two FLECK 2850 VALVES
 GATE VALVES ISOLATE Cu/Oxy CHAMBERS
 THREE YEAR MEDIA CHANGE OUT, VALVE REBUILD KIT
 THREE YEAR COPPER CHANGE OUT
 MONTHLY Cu/Oxy CHAMBER CLEAN
 VALVE TIMERS CONFIRMED
 ALL TANKS BACKWASH AT DIFFERENT TIMES
 GAC FLOW CONTROL 7 DFCL
 HYDROXITE FLOW CONTROL 12 DFCL
 110v / 60Hz ECOsmarte CONTROLLERS
 FLECK 2850 VALVES, REBUILD KIT 3RD YEAR

FLOW restricted
 at 21GPM to
 keep sprinkler
 heads in ground.

LOGISTICS:

SHIPS 2 PALLET; 400lbs ON EACH PALLET